

SPLICELINE®

IN-LINE WIRE CONNECTORS

- Crimp-free, push-in butt splice
- Low insertion force for fast connections
- Easily passes through 1/2 in. knockouts
- End-to-end connection ideal for pre-fab operations
- Transparent polycarbonate window for visual inspection of connection
- Wide wire range of 20-12 AWG solid, 16-12 AWG stranded
- Listed for UL 467
- Made in U.S.A.



75%
FASTER
THAN BUTT SPLICES
NO MORE CRIMPING

THE ELECTRICIAN'S
CHAMPION™




SPLICELINE®

IN-LINE WIRE CONNECTORS

A faster, innovative alternative to the butt splice

Introducing SpliceLine®, a revolutionary in-line wire connector. Utilizing patented push-in technology, the unique design provides a crimp-free, solderless butt splice making applications easier and faster. The 2-port model supports a wide range of either stranded or solid wires, allowing one connector to cover the same wire range as three traditional butt splices. The end-to-end connection of SpliceLine® is a great solution for today's pre-fab operations and also makes it perfect for lengthening short wires in tight spaces. It easily passes through 1/2" knockouts and the transparent polycarbonate allows for a secure connection every time. It's UL listed for wire splicing and made in the U.S.A. by IDEAL, the leader in wire connectors.

GREAT
PRE-FAB
SOLUTION

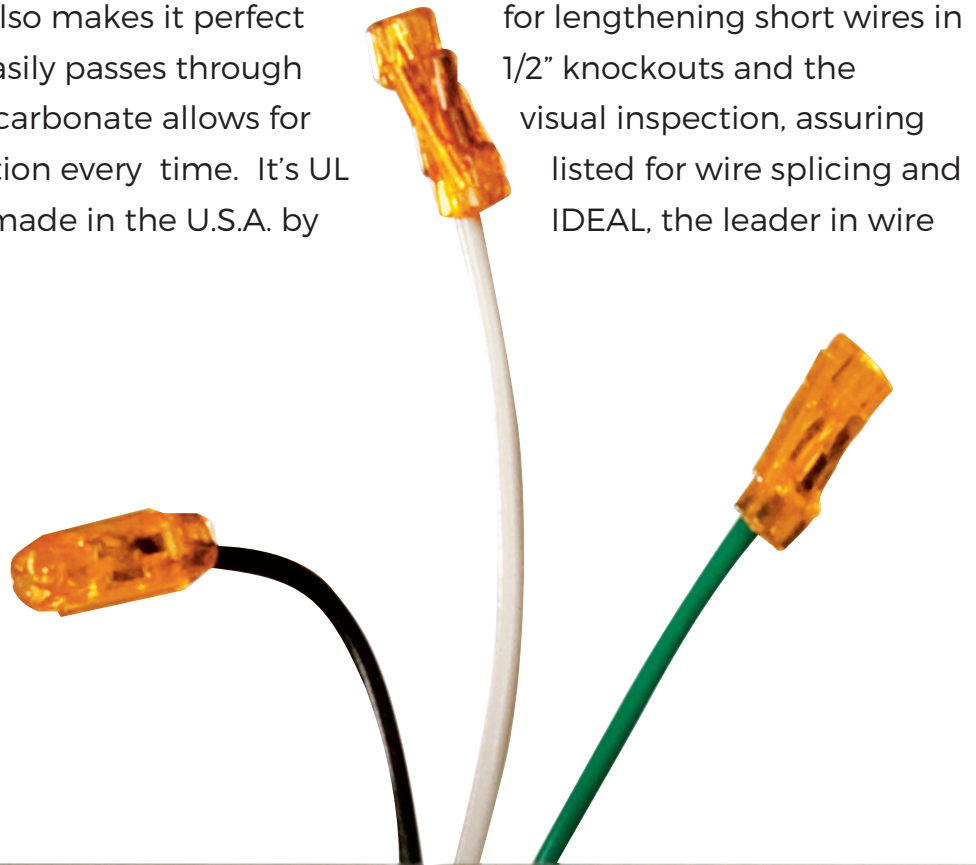

75%
FASTER
THAN BUTT SPLICES
NO MORE CRIMPING

Transparent polycarbonate shell allows for visual inspection of connection

Check port for continuity testing

Slim design fits through 1/2" knockout

Accepts solid or stranded wire

SpliceLine®
IN-LINE WIRE CONNECTORS




SPLICELINE®


IN-LINE WIRE CONNECTORS


A faster butt splice. A better butt splice.

SpliceLine®
IN-LINE WIRE CONNECTORS



Butt Splice



Model	Quantity	Cat. No.
	Bag of 10	30-1342S
	Box of 100	30-1042
	Jar of 300	30-1042J
	Box of 2,500	30-1642

Wire range - any combination

Solid	20 - 12 AWG
Stranded	16 - 12 AWG (≤19 str.)
Stranded Tin-Bonded	18 - 14 AWG (≤19 str.)

600V/20A max.
105°C

For use on insulation types
TFN, TFFN, THHN, XHHW,
T90 nylon or equivalent.



**Cu/Cu
only**



IDEAL INDUSTRIES, INC.

1800 S. Prairie Drive, Sycamore, IL 60178, USA / 815-895-5181 · 800-435-0705 in USA

International offices: Australia · Canada · China · Germany · Mexico · UK

For complete sales office contact information, visit us at:

www.idealind.com

Rev. 3/20
Form No. P-5003

Printed in USA
©2020 IDEAL INDUSTRIES, INC.