




375

Domed Head Plastic Stopping Plug

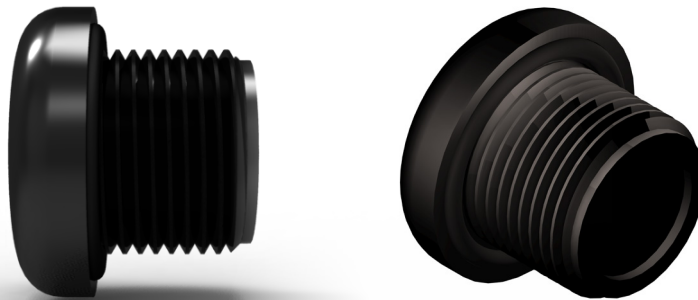

Technical Data

Ingress Protection	IP66, IP67
Operating Temperature	-60°C to +75°C
Construction Materials	Manufactured in Polyamide with Nitrile O-Ring
Threadform	M16 to M75 Thread Length 15mm as standard Thread Pitch 1.5mm as standard

Approvals

Applications	Suitable for Use in Zone 1, Zone 21, Zone 2, Zone 22
Protection Class	Ex II 2GD Ex eb IIC Gb; Ex tb IIIC Db
Construction & Test Standards	IEC/EN 60079-0, IEC/EN 60079-7 and IEC/EN 60079-31
ATEX Certificate No	Baseefa 12ATEX0095X
UKEx Certificate No	UKEx: BAS21UKEX0053X
IECEx Certificate Number	IECEx BAS 12.0065X
Marine Approvals	ABS: 17-LD1653734-PDA Bureau Veritas: 43523/B0
Additional Certifications	EAC: No EA3C RU C-GB.HA91.B.00265/21* EQM: 20-11-27224/Q20-11-000979/NB0007 Inmetro: IEx 15.0291X PESO: P409088 SONCAP: LCOGB049552-0500

NEC/CEC*

*Only marked on request

NEC Protection Class	Class 1 Zone 1 AEx eb IIC Gb Zone 21 AEx tb IIIC Db
CEC Protection Class	Ex eb IIC Gb; Ex tb IIIC Db
c CSA us Certificate	2700364
Construction & Test Standards	CSA C22.2 No 0-10; CSA/UL 60079-0; CSA/UL 60079-7; CSA/UL 60079-31; IEC 60529

Size Selection

Thread Size	Head Diameter (mm)	Allen Key Socket Size (mm)
M16	23	8
M20	27.5	10
M25	32	10
M32	39	10
M40	49	10
M50	59	10
M63	72	10
M75	84	10

Ordering Information

Product	Thread Size	Material	Finish
375	M32	N/A	N/A