

ECO FLOODLIGHT HIGH OUTPUT


Product Features

- Domestic floodlight suitable for residential applications
- Die cast aluminium housing
- Supplied with fixing bracket
- Pre-wired 0.75m HO5RN-F cable
- 100W also available in White, please contact Luceco for further information



CAT NO.	LUMINAIRE LUMENS	WATTAGE
EFLD100B40	750	100W
EFLD150B40	11250	150W
EFLD200B40	15000	200W

Product Drawing

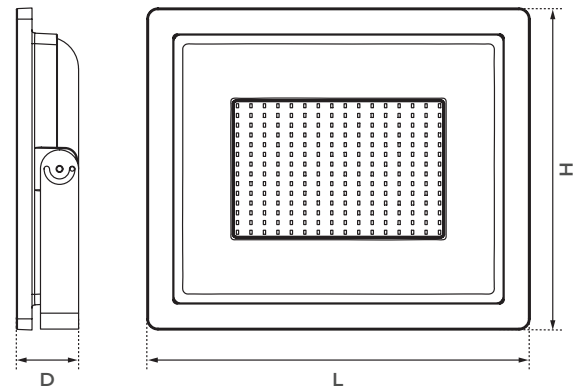

Product Dimensions

CAT NO.	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)
EFLD100B40	337	42	290
EFLD150B40	337	53	281
EFLD200B40	362	59	304

CAT NO.	WEIGHT (Kg)	EFFICACY (Lm/W)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EFLD100B40	2.8	75	≥80	50	IK06	-20 to +45	25	70/50
EFLD150B40	3.6	75	≥80	50	IK06	-20 to +45	25	70/50
EFLD200B40	4.6	75	≥80	50	IK06	-20 to +45	25	70/50

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-5	Luminaires - Floodlights
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
61000-3-3	Lamp controlgear - Part 1: General and safety requirements
61547	Equipment for general lighting purposes - EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment



LUCECO

This luminaire contains built-in LED lamps.

A++	}	LED
A+		
A		
B		
C		
D		
E		

The lamps cannot be changed in the luminaire.

874/2012