





	INSTALLATION CONTACTORS (INC)					
	20	25	40	63		
	INC202	INC254	INC402	INC634		
RATING (Ith) A						
PART NUMBER	INC202	INC254	INC402	INC634		
GTIN-13	5060523520473	5060523520480	5060523520497	5060523520503		
INNER CARTON QUANTITY	1	1	1	1		
OUTER CARTON QUANTITY	6	4	4	3		
NUMBER OF POLES (N/O)	2	4	2	4		
WEIGHT (1PC) Kg	0.146	0.235	0.26	0.36		
DEVICE WIDTH (mm)	18	36	36	54		
HEAT DISSIPATION SPACERS (add 18mm to module width)	2x9mm(18mm)	2x9mm(18mm)	2x9mm(18mm)	2x9mm(18mm)		
AC-7a (A)	20	40	25	63		
AC-7b (A)	6.4	15	8.5	20		
Ith (thermal) A	20	40	25	63		
Holding VA	2.7	4.6	4.6	6.5		
Inrush VA	9.2	34	34	53		
Dissipated W	1.2	1.6	1.6	2.1		
TORQUE SETTING (CONTROL CIRCUIT) A1 A2	0.8Nm	0.8Nm	0.8Nm	0.8Nm		
TORQUE SETTING (POWER CIRCUIT)	0.8Nm	3.5Nm	0.8Nm	3.5Nm		
MAXIMUM CABLE CAPACITY (mm ²)	4	16	4	16		
RATED VOLTAGE (Un/AC)	230V					
FREQUENCY (Hz)	50/60					
PROTECTION DEGREE (IP)	20					
MOUNTING	35mm DIN RAIL					
MATERIAL	PA6 NYLON					
ORIGIN OF MANUFACTURE	CHINA					



AC-7a: Small Inductive loads in domestic dwellings such as TV, mixers, drills, etc

AC-7b: Rotating machines in domestic dwellings such as fans, central vacuum cleaners, washing machines etc

DIMENSIONS

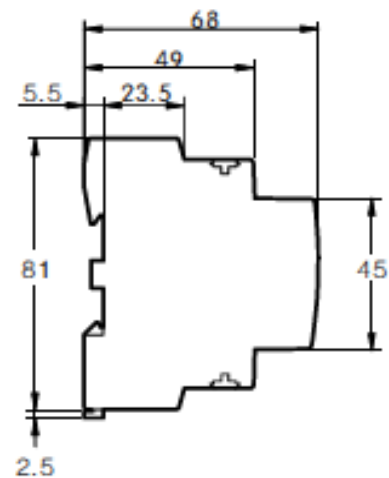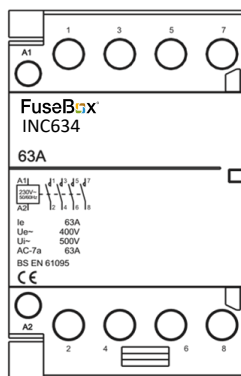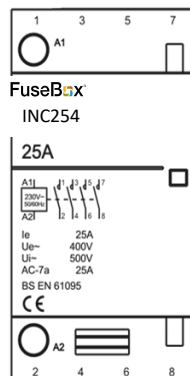

INSTALLATION

