

Isolator Datasheet IS2100

Construction and Features

- To fit the CPN-Cudis' range of Consumer Units, Enclosures and 3 Phase Distribution Boards.
- Capable of switching electrical circuits with load.
- Incoming control device - Isolator
- Contact Indication - ON/OFF
- 2, 3 & 4 Poles available
- For protection and life-extension of electrical and electronic equipment




Technical Data

- Number of Poles: 1, 2, 3, 4
- Rated Current: 100, 125A
- Rated Voltage: 230/400V AC
- Rated frequency: 50 / 60 Hz
- Torque setting for screws: 2.5Nm (maximum)
- Connection capacity: 35mm² conductor
- Connection: Pillar terminal with clamp
- Installation: DIN Rail 35mm; panel mount

Wiring Diagram

N/A

Overall & Installation Dimensions

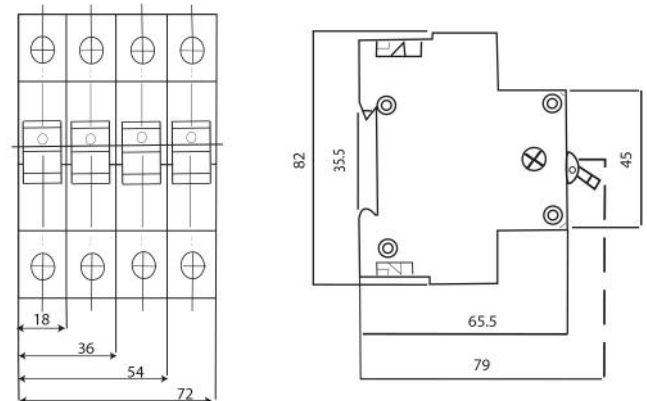

Standard: IEC947-3 