


13A Socket Outlets

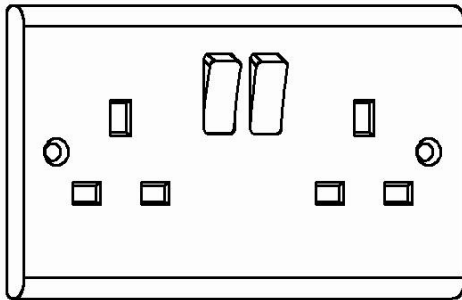

Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched. This uniquely shaped range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual protective bags.

Features

- Unique slim profile with curved top and bottom edges
- Concave rockers
- Only one size 4mm screwdriver needed
- Terminals have clearly embossed and white printed markings
- Colour coded terminals
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Most products have angled terminals to aid installation
- Terminals have large lead-ins
- 25-year guarantee

Technical Specification

Voltage rating 250Vac
 Current Rating 13A per outlet
 Contact gap 3mm
 Frontplate material Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

Standards

- BS 1363: Part 2

Range

Unswitched- 13 Amp

1g unswitched S1206
 2g unswitched S1208

Single Pole – 13Amp

1g recessed SP switch S1207R
 1g standard SP switch S1207S
 2g recessed SP switch S1209R
 2g standard SP switch S1209S

Double Pole – 13Amp

1g standard DP switch S1207SDP
 1g standard DP switch & neon S1207DPP
 2g standard DP switch S1209SDP
 2g standard DP switch & neon S1209DPP
 2g standard outboard DP switch S1293
 2g standard outboard rockers clean earth S1296
 Fixing screw caps S1419WH

Longer Length Fixing Screw

50mm Length (Pack of 10) - chrome SP0001CH
 75mm Length (Pack of 10) - chrome SP0003CH

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	V1221
2g	DB163	DB2541	V1223

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1