


50A Double Pole Switches

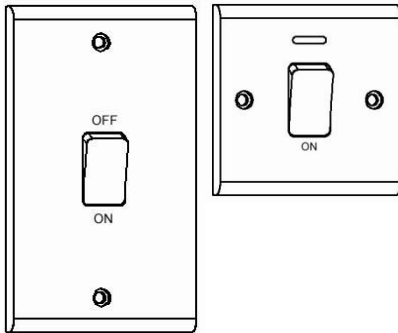

Description

This uniquely shaped range, in the Deta Slimline style, is easy to install with coloured terminals, clear white terminal markings and is supplied in individual protective bags.

This wide range includes cooker control units, neon versions, and an option of red or white switches.

Features

- Unique slim profile with curved top and bottom edges
- Concave rockers
- Only one size 4mm screwdriver needed
- Terminals have clearly embossed and white printed markings
- Colour coded terminals
- Square or tall versions available
- Neon versions available
- Neon leads enclosed
- Earth terminals
- Terminals have large lead-ins
- 25-year guarantee

Technical Specification

Voltage rating	250Vac
Current Rating	50A per outlet
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

For use as an Isolator switch, not for functional switching

Standards

- BS EN 60669-1

Range

50 Amp

Switch – red rocker	S1300
Switch with neon – red rocker	S1300P
Switch – white rocker	S1310
Switch with neon – white rocker	S1310P

50 Amp Tall

Switch – red rocker	S1301
Switch with neon – red rocker	S1301P
Switch – white rocker	S1311
Switch with neon – white rocker	S1311P

Back Boxes

Minimum recommended depth

	Flush 47mm	Dry lining 46mm	Surface 46mm
1g	DB167	DB2542	V1228
2g	DB168	DB2543	V1229

Terminal Capacity

	6mm ²	10mm ²
L & N	2	1