


## 20A DP Switches

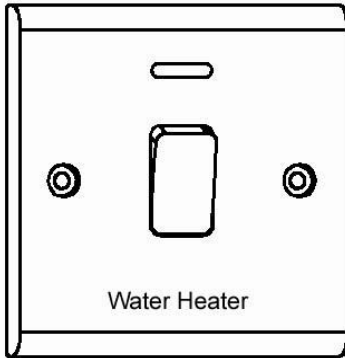

### Description

This uniquely shaped range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual protective bags.

This wide range includes engraved, flex outlet and neon versions.

### Features

- Unique slim profile with curved top and bottom edges
- Concave rockers
- Only one size 4mm screwdriver needed
- Terminals have clearly embossed and white printed markings
- Colour coded terminals
- Grey font engraving
- Neon versions available
- Neon leads enclosed
- 2 earth terminals
- Terminals have large lead-ins
- 25-year guarantee

### Range

Switch	S1390
Switch 'Water Heater'	S1390WH
Switch with neon	S1391
Switch with neon 'Water Heater'	S1391WH
Switch with front flex outlet	S1392
Switch with Neon & front flex outlet	S1393
Switch with neon & front flex outlet 'Water Heater'	S1393WH
Dual switch with neon	S1218P

### Technical Specification

Voltage rating	250Vac
Current Rating	20A
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-C

No user serviceable parts

### Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	V1221

### Standards

- BS EN 60669-1

### Terminal Capacity

	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
L & N	4	2	2	1